



**FORKARDT
HARDINGE**





Universal Ball-Lok (UBL) Chuck

Universal Ball-Lok (UBL) Chuck


The Forkardt Hardinge comprehensive line of workholding begins with the "UBL". It is "The Original" used industry wide and it sets the standard for all other power chucks.

The features of the UBL include:


- Easy conversion from external to internal chucking
- Positive pullback action
- Chucks are internally lubricated and have a sealed design to keep chips and contaminants out
- Jaw homing device allows jaws to compensate for part variations
- Various jaws for different work pieces can be readily interchanged
- Offered in Centralizing and Compensating
- Centralizing chucks put the work piece on the center rotation
- Compensating chucks enable the actuator to float and allow the chuck jaws to engage independently of the chuck center of 0.0005" TIR or better, assuring that the collet will hold your part consistently throughout your machining operation.

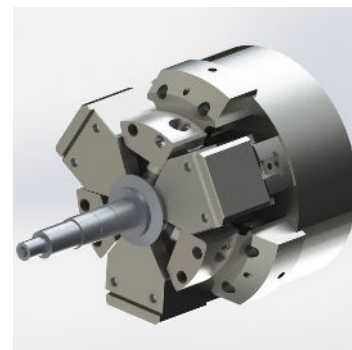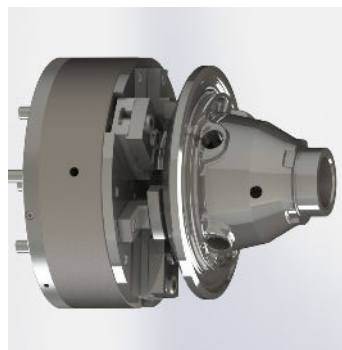

Recommended Chucking Ranges

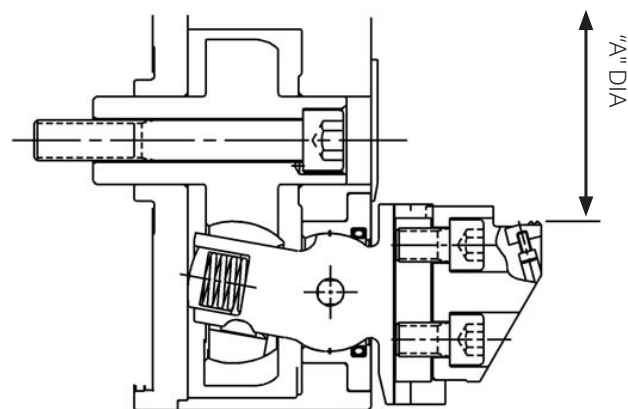

External Mode

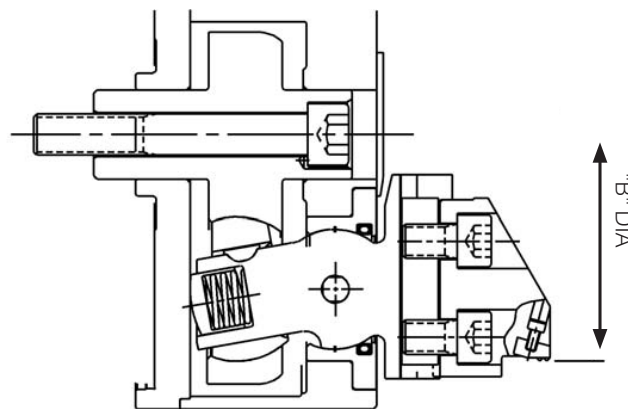

Internal Mode

		"A" Diameter External Chucking Range (Recommended)	"B" Diameter Internal Chucking Range (Recommended)
		maximum / minimum	maximum / minimum
UBL Size	160	120 / 14	150 / 70
	200	150 / 16	200 / 80
	250	200 / 50	230 / 85
	300	240 / 65	300 / 130
	380	315 / 80	380 / 165
	460	390 / 90	455 / 245

All sizes are in millimeters.


The above recommended chucking ranges are for general applications. If an application has a part size that exceeds the above maximum or minimum, contact the Woodworth proposal department for review.

Internal and External clamping modes


To change from OD clamping to ID clamping:

1. Remove 4 bolts from each front bearing.
2. Rotate actuator arm 180 degrees (without removing from the chuck body).
3. Replace and tighten front bolts.

Positive pull-back action

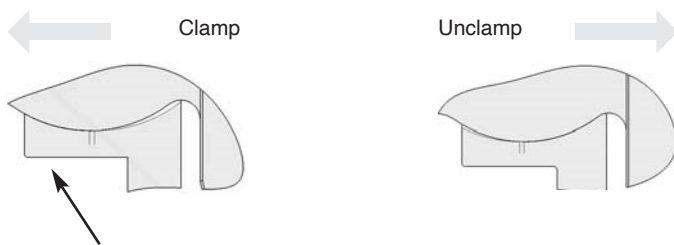


A flat is provided at the center of the spherical diameter. This flat is what enables the pull-back feature. The flat is standard in our bearings, or can be customized for specific needs.

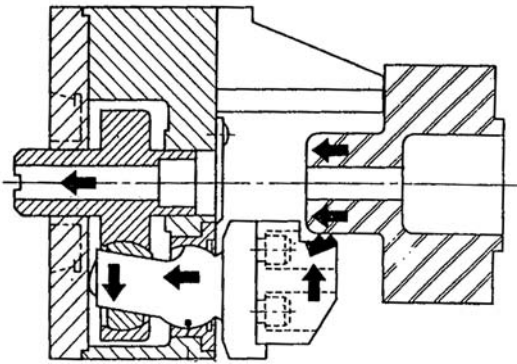


Homing function of jaws

"Homing" is the ability of the jaws to rotate up to 5 degrees in either direction. "Homing" allows the jaws to compensate for castings and forgings that are not perfectly round and insures secure and equalized gripping force at all chucking points.

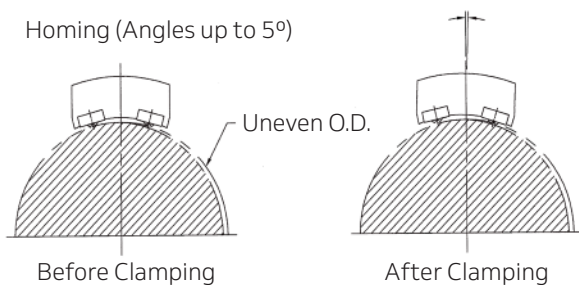


Ability to grip shorter lengths and tapered diameters

UBL chucks can grip work-pieces having up to a 7 degree taper. With standard jaw design and up to 12 degrees with minor modifications.

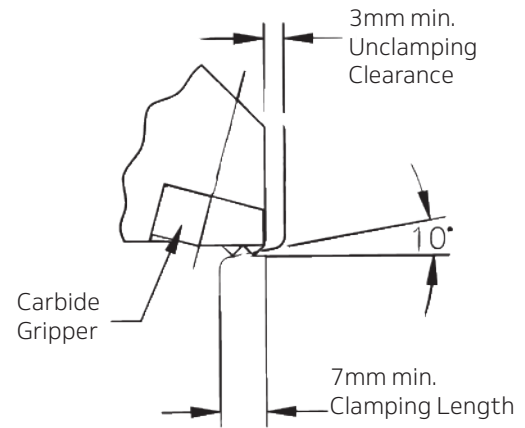

Extended life

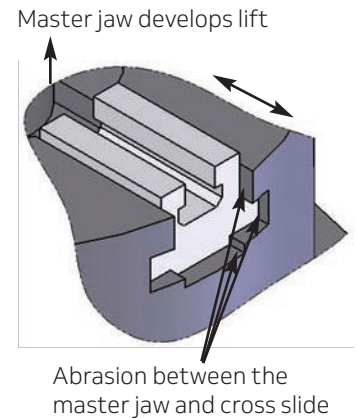

The life of a standard, sliding jaw, power chuck is greatly reduced by abrasion between the master jaws and chuck body. Over time the base jaws will develop lift.


The UBL chucks utilize a spherical ball and bearing design which reduces wear, thus extending the life of the chuck.

Component interchangeability

UBL components are designed and manufactured for interchangeability. Replacement components can be easily installed; maintaining the original accuracies. Components are in stock and can be promptly delivered.

Centralizing Type


Centralizing UBL Chucks work by utilizing a one-piece actuator device which allows the chuck jaws to establish the axis of rotation. The diameters being turned will then be concentric to the chucking diameter. The pull back feature insures the work piece is against an axial locator which guarantees perpendicularity and parallelism. Below are some practical examples.

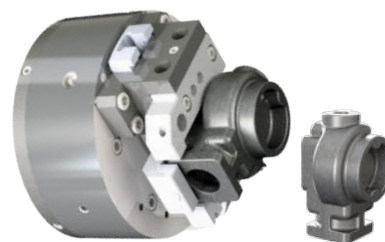

Oil Pump Housing




Compensating Type

Compensating UBL chucks use a two-piece actuator to adjust for any eccentricity between the chucking and datum diameters. A centralizing device—such as a Tork-Lok arbor, locating plug, or center mounted on the chuck face—establishes the rotation axis from the workpiece's datum. This ensures all turned diameters are concentric to the datum, whether clamping cast surfaces with an arbor or plug, or holding the workpiece between two centers.

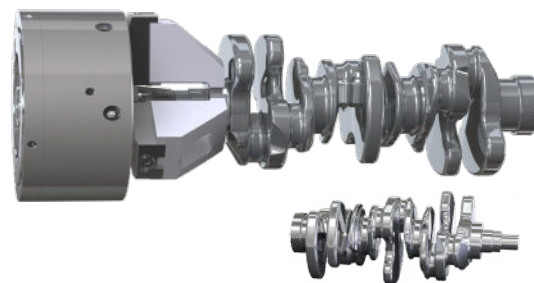


Crankshaft

Below are the measurements based from the specifications chart on the right.

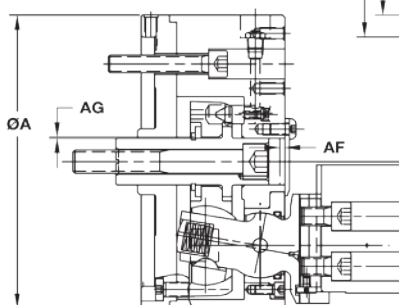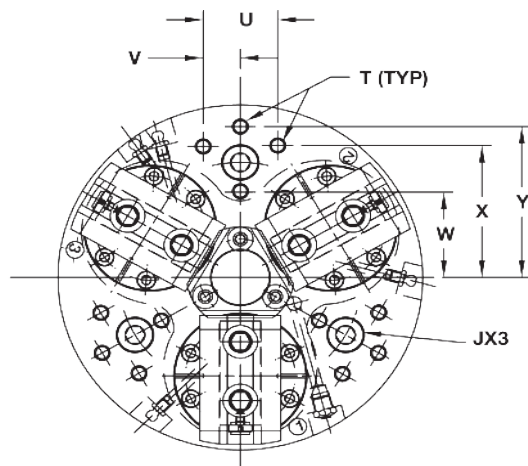


COMPENSATING
STYLE

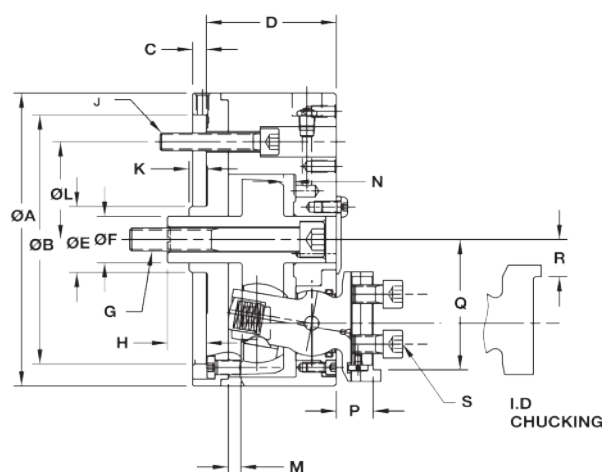

	Chuck Size						
		160	200	250	300	380	460
(2/Jaw) Model Number		UBL160010	UBL200010	UBL250010	UBL300010	UBL380010	UBL460010
(3/Jaw) Model Number		UBL160000	UBL200000	UBL250000	UBL300000	UBL380000	UBL460000
COMPENSATING							
(2/Jaw) Model Number		UBL160012	UBL200012	UBL250012	UBL300012	UBL380012	UBL460012
(3/Jaw) Model Number		UBL160002	UBL200002	UBL250002	UBL300002	UBL380002	UBL460002
Dimensions (mm)							
Chuck Diameter	A	160	200	254.1	298.6	381	457.3
Mounting Recess Dia.	B	140	170	220	220	300	380
Depth of Recess	C	8.7	8.7	8.7	8.7	14.3	13.5
Chuck Height	D	72.2	84.2	103.2	103.2	116.7	116.7
Back Plate Boss Dia.	E	42	45	57.2	60	85	120.65
Actuator Dia.	F	30.2	31.8	41.3	41.3	57.15	88.9
Draw Bar Thread	G	M16 x 2	M16 x 2	M20 x 2.5	M20 x 2.5	M24 x 3	M24 x 3
Actuator Position	H	23.5	25.1	28	28	38.7	28
Chuck Mounting Bolt Size	J	M10 x 1.5	M12 x 1.75	M16 x 2	M16 x 2	M20 x 2.5	M24 x 3
Length of Boss	K	6.8	11.1	8.7	8.7	16	8.7
Mounting Bolt Circle Dia.	L	104.8	133.4	171.4	171.4	235	330.2
Actuator Stroke to Full Close	M	5.2	8	7.9	7.9	10.4	10.4
Actuator Stroke to Full Open	N	6.4	6.3	9.7	9.8	11.9	11.9
Total Actuator Stroke	M+N	11.6	14.3	17.6	17.7	22.3	22.3
Jaw Mounting Platform	P	19.4	23.7	29.2	29.2	32.5	32.5
Jaw Ledge (External Grip)	Q	73.03	88.9	112.7	133.35	171.45	209.55
Jaw Ledge (Internal Grip)	R	22.23	25.4	30.14	50.81	69.85	103.95
Jaw Mounting Screw Size	S	M10 x 1.5	M12 x 1.75	M16 x 2	M16 x 2	M20 x 2.5	M20 x 2.5
Tooling Mounting Screw Size	T	M8 x 1.25	M8 x 1.25	M10 x 1.5	M10 x 1.5	M12 x 1.75	M16 x 2
Position of "T" (3) Jaw	U	N/A	N/A	50	50	N/A	N/A
Position of "T" (3) Jaw	V	N/A	N/A	25	25	N/A	N/A
Position of "T" (3) Jaw	W	35	50	60	60	82.5	110
Position of "T" (3) Jaw	X	N/A	N/A	97.5	100	N/A	N/A
Position of "T" (3) Jaw	Y	70	87.5	N/A	N/A	152.5	200
Position of "T" (2) Jaw	Z	80	100	125	210	150	200
Position of "T" (2) Jaw	AA	40	50	62.5	105	75	100
Position of "T" (2) Jaw	AB	N/A	35	45	90	100	200
Position of "T" (2) Jaw	AC	N/A	17.5	22.5	45	50	100
Position of "T" (2) Jaw	AD	85	N/A	N/A	65	N/A	N/A
Position of "T" (2) Jaw	AE	170	N/A	N/A	130	N/A	N/A
Maximum drawbar force (2) Jaw (KN)		17	26	31	35.5	44	44
Maximum static gripping force (2) Jaw (KN)		42	64	75	86	107	107
Maximum drawbar force (3) Jaw (KN)		26	35	44.5	53	66	66
Maximum static gripping force (3) Jaw (KN)		64	85	108	130	160	160
Maximum RPM		5500	4200	3600	3200	2600	2100
Jaw Weight (kg)		1.07	1.87	3.09	3.77	5.87	7.26
Chuck Weight (kg)		11.34	24.95	38.56	54.43	117.93	145.15

1 KN = 224.81 lbs. (Force)

1 kg = 2.20 lbs. (Weight)

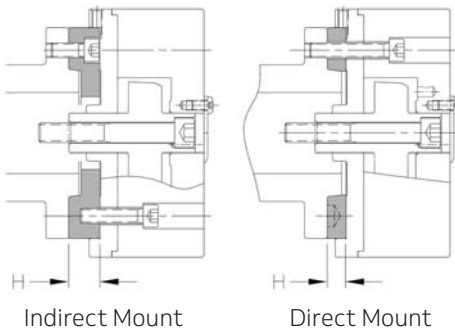

CHUCK SIZE	SPINDLE NOSE	H	TYPE	INDIRECT	DIRECT	L*
UBL 160	4	18	140-K4	D1074053000	n/a	–
	5	14	140-K5	n/a	D1074035000	15
UBL 200	5	24	170-K5	D1074056000	n/a	–
	6	15	170-K6	n/a	D1074036000	15
UBL 250	6	28	220-K6	D1074060000	n/a	–
	8	17	220-K8	n/a	D1074038000	15
UBL 300	6	28	220-K6	D1074060000	n/a	–
	8	17	220-K8	n/a	D1074038000	15
UBL 380	8	32	300-K8	D1074065000	n/a	–
	11	19	300-K11	n/a	D1074040000	20
UBL 460	11	35	380-K11	D1074068000	n/a	–
	15	21	380-K15	n/a	D1074042000	20

* Length of the chuck mounting bolts must be increased by the amount *L* when using adapter plates

General Installation and Maintenance Instructions

DESCRIPTION

The 3 jaw centralizing Universal Ball-Lok Chuck is a sealed unit, designed for excellent performance, durability and ease of maintenance. The chucking action is achieved by a spherical ball and bearing mechanism. Utilizing its radial and pull-back jaw stroke, draft angles of up to 7 degrees can be safely gripped.

INSTALLATION

Support the chuck with a sling or eye bolt. With the drawbar in the forward position, thread the drawbar screw into the drawbar. Retract the drawbar at reduced pressure until the chuck contacts the spindle mounting face. Insert the chuck mounting screws and tighten per manufacturer's specifications. Check the installation and jaw stroke by actuating the cylinder. Make sure the unit is well lubricated with approved grease, or equivalent, and actuate the chuck a few times before use.



JAWS AND GRIPPERS

Jaw safety screws retain the t-nuts in the ball arms. It is very important that they are not removed and remain fully tightened. The jaw blanks can be bored in position using boring slugs (jaw blanks and boring slugs furnished at additional cost). Check to make sure the jaw mounting bolts are tightened per manufacturer's specifications. Special jaws can be designed to enhance the utilization of the Ball-Lok chuck. Please consult our Engineering team for further information. Part prints and process sheets will be required to complete the design.


MAINTENANCE

At a minimum drawbar pull, check to ensure the chuck actuates smoothly. If this test results in a rough or uneven actuation, apply the recommended grease until the relief valve shows signs of excess grease. It is recommended to establish a preventive maintenance schedule. Visual inspection, operator care and periodic PM will enhance and extend the life of the unit. Depending on the severity of this environment, it is recommended that the chuck be disassembled and visually inspected for wear signs in the arms, bearings and actuator every 6 months. If considerable wear is detected, replace the parts immediately.

Performance Data

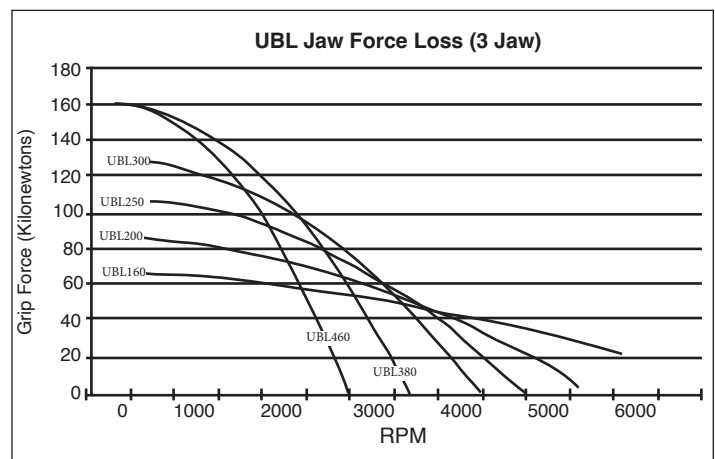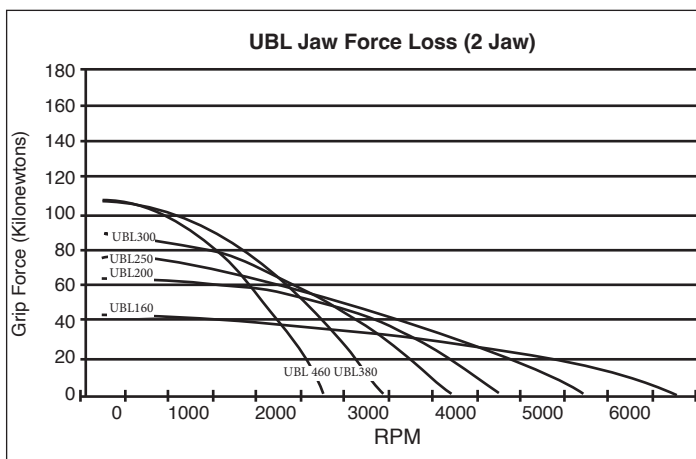

		Included in Kit Numbers					
	Description	1	2	3	4	5	6
B	Retaining Ring						1
C	Retaining Spacer						1
E	Centralizing Pin						3
H	Eccentric Bearing		3				
J	Spring Cap	3		1			
K	Arm Spring	3		1			
L	Arm Key	3	3	1			
M	Homing Spring	3		1			
N	Restrictor Pin	3		1			
O	Homing Pin	6		2			
P	T-Nut				3		
Q	Safety Screw				3		
S	Jaw Bolts				6		
T	Arm			1			
U	Arm Seal	3		1		3	
V	Front Bearing			1		3	
X	Grease Fitting	4					
Y	Relief Valve	1					
A	Floating Actuator	Purchase Separately					
D	Actuator Support	Purchase Separately					
F	Plain Back Adapter	Purchase Separately					
G	Actuator	Purchase Separately					
I	Housing	Purchase Separately					
R	Jaw Blank	Purchase Separately					
W	Dust Cover	Purchase Separately					

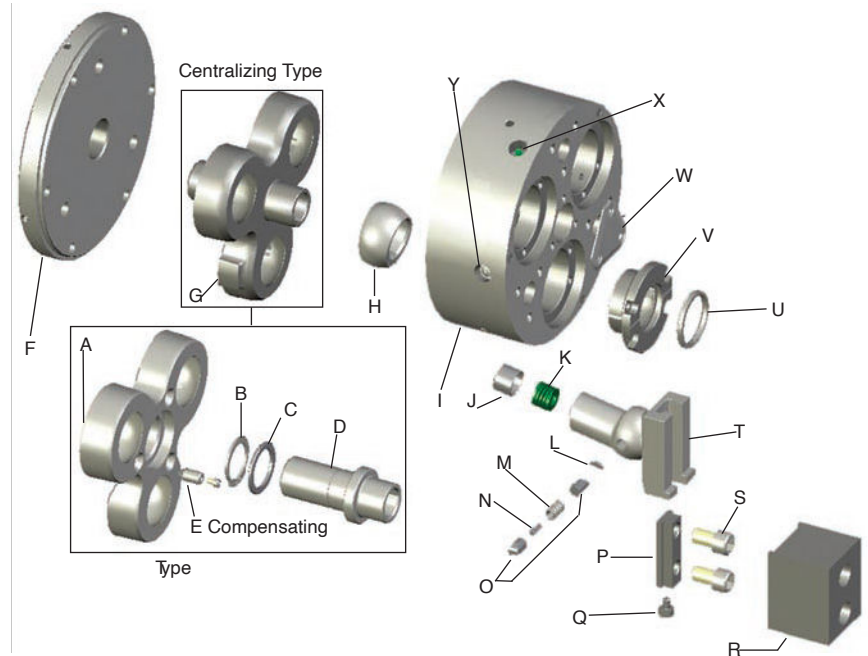

SERVICE KITS


		HARDWARE	ECC. BEARING	ARM (02)*	TEE-NUT	FRONT BEARING*	COMP.	JAW BLANK
Kit Number		1	2	3	4	5	6	
UBL Size	160	UBL160HK	UBL06BK	UBL1602AK	UBL160TN	UBL1602BK	UBL06CK	UBL-6801-B
	200	UBL200HK	UBL08BK	UBL2002AK	UBL200TN	UBL2002BK	UBL200CK	UBL-8801-B
	250	UBL250HK	UBL10BK	UBL2502AK	UBL250TN	UBL2502BK	UBL250CK	UBL-10801-B
	300	UBL250HK	UBL10BK	UBL2502AK	UBL250TN	UBL2502BK	UBL250CK	UBL-12801-B
	380	UBL380HK	UBL15BK	UBL3802AK	UBL380TN	UBL3802BK	UBL380CK	UBL-15801-BM
	460	UBL380HK	UBL15BK	UBL3802AK	UBL380TN	UBL3802BK	UBL380CK	UBL-18801-BM

*These kits are set up for use with our standard UBL chuck using standard pull-back bearings. Please specify if "non" pull-back bearings are required.

Solid Carbide Inserts for Chuck Jaws

• Replaceable • Increase life of top jaws • Reduce chuck jaw inventory

Install these rapid-change, long-life inserts in your chuck jaws. After an extensive period of maintenance-free service, inserts can be easily and quickly replaced without the necessity of costly down-time. Both styles offer positive gripping on rough or smooth surfaces of castings, forging, etc. Angle-Lok inserts offer additional advantages - permit tools to come closer to the top of the jaws and provides clamping on narrow chucking land.




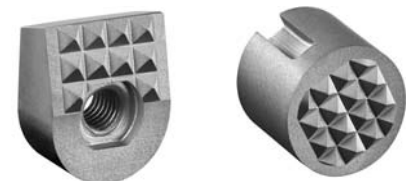


Angle-Lok style

Round style

See Insert Catalog for additional styles and sizes

Forkardt Hardinge, a solution for every industry



**FORKARDT
HARDINGE**

833-791-9681
FORKARDTHARDINGE.COM
SALES@FORKARDTHARDINGE.COM

All prices & specifications are subject to change without notice.
All marks indicated by ® and TM are trademarks of their respective owners.
#2510_UBL Chuck in USA © Forkardt Hardinge 2025 • 06/25